

RADIATION RESISTANT TWO CONDUCTOR CABLE ASSEMBLY

Model 2001



Product description

The Parker Meggitt Model 2001 is a Tefzel based jacketed, 2 conductor cable terminated with a two pin receptacle with 7/16-27 UNS-2A threads on one end a pigtail on the other end. It features a rugged back shell, strain relief design for increased ruggedness and long term life.

The cable design and material selection allows use in nuclear environments. It is designed specifically for piezoelectric accelerometers with high impedance outputs for use in severe environments.

The Parker Meggitt Model 2001 is an instrumentation cable assembly designed to carry sensitive signals in a vibration environment. The cable is designed to interface to differential accelerometers in environments with radiation- reactors.

Model number definition:
2001-XXX
XXX = cable length in inches

Key features and benefits

- Operation to +392°F (+200°C)
- Torqueable coupling nut
- For use with differential accelerometers
- RoHS compliant

Applications

- Test Cells/engine interface cable
- Nuclear reactors



Parker Meggitt Defense Systems
9801 Muirlands Blvd.
Irvine, CA 92618
+1 (949) 465 7700
www.meggittdefense.com

RADIATION RESISTANT TWO CONDUCTOR CABLE ASSEMBLY

Model 2001

Specifications

The following performance specifications are typical values, referenced at +75°F (+24°C) unless otherwise noted.



Characteristics	Units	2001
Capacitance, nominal Cable		
Resistance, minimum	pF/ft.	80
Signal leads	GΩ	1
Signal lead to shield	GΩ	1
Physical		
Conductor		
Size	AWG	20
Material		Nickel-plated annealed copper weld
Primary Insulation		Tefzel- black and white
Shield		38 AWG nickel-plated copper
Jacket	Material/Color	Tefzel/Grey
Overall diameter	inch (mm)	.23 (5.8)
Weight, nominal	pounds / ft.	.04
Bend radius, min.	inch (mm)	.60(15.2)
Connector		
Coupling Nut	Nickel plated aluminum	
Insulators	Alumina Ceramic	
Sockets (#20)	Gold plated nickel alloy	
Clamp Hardware	Stainless Steel	
O-Ring & Grommet	High Temp Silicone Rubber	
Environmental		
Temperature	°F (°C)	-65 (-54) to +392 (+200)
Radiation		
Integrated Gamma Flux	Up to 6.2 x 10 ¹⁰ rad	
Integrated Neutron Flux	Up to 3.7 x 10 ¹⁸ neutrons/cm ²	
Contamination	O-ring sealed to exclude fuel, oil, humidity, sand or dust	



Defense
Systems


RADIATION RESISTANT TWO CONDUCTOR CABLE ASSEMBLY

Model 2001

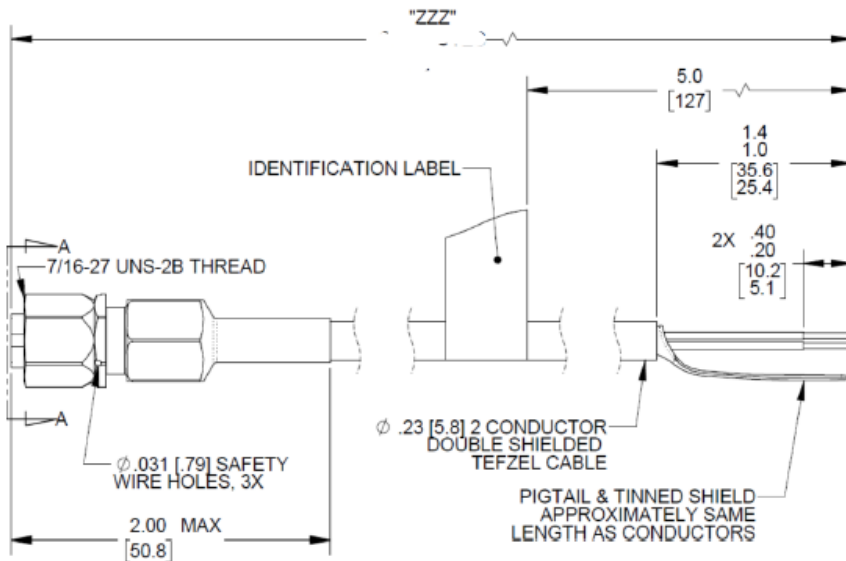

SEE NOTES [1] [2]

CABLE LENGTH TOLERANCE	
LENGTH	TOLERANCE
UP TO 24.00 [609.6]	+ 1.00 [25.4]
OVER 24.00 TO 72.00 [609.6 TO 1.83M]	+ 2.00 [50.8]
OVER 72.00 TO 144.00 [1.83M TO 3.66M]	+4.00 [101.6]
OVER 144.00 [3.66M]	+4.00 [101.6 PER EACH 144.00 [3.66M] OR PART THEREOF.

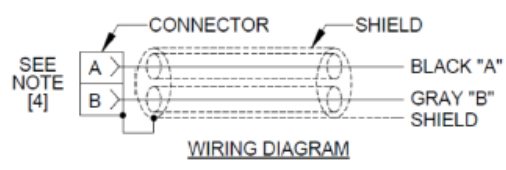

Continued product improvement necessitates that MEGGITT reserve the right to modify these specifications without notice. MEGGITT maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. 010121



Note: Due to continuous process improvement, specifications are subject to change without notice. TCO Review # 322