

**DATA SHEET**

# High Temperature Hardline Cable Assembly

With Additional Isolation Protection

## Model 3075M19



### 01 Description

The Meggitt model 3075M19 is a low noise hardline cable assembly for use in high temperature environments. It is hermetically sealed for resistance to corrosion, humidity and other environmental contaminants. The cable features three layers which include Kapton, fiberglass and stainless steel braid to prevent inadvertent grounding in extreme conditions. This cable has a history of long-term reliability in both high temperature and nuclear reactor environments.

Both cable assembly ends are terminated into a glass fired 10-32 connector providing unparalleled strength and hermeticity. An optional 10-32 to 10-32 high temperature cable joiner is available (model 33268) for conjoining two 3075M19's into a single unit.

Model number definition:

3075M19-ZZZ

3075M19= basic model number

ZZZ = cable length in inches

### 02 Key features and benefits

- Operating temperature to +725°F (+385°C)
- Rugged and bendable
- Three sleeves (Kapton, fiberglass and SST) to prevent inadvertent grounding
- Hermetically sealed
- RoHS complaint

### 03 Applications

- For use with high temperature piezoelectric accelerometers
- Nuclear reactor environments

### 04 Contact

1-833-HITEMP1

TMCSR.MSSOC@meggitt.com

## DATA SHEET

# HIGH TEMPERATURE HARDLINE CABLE ASSEMBLY, Model 3075M19

## 05 Specifications

The following performance specifications are typical values, referenced at +75°F (+24°C) unless otherwise noted.


	Units	3075M19
<b>Connectors</b>		
Connector 2	in (mm)	10-32 NF, 0.230 dia. (5.84)
Dielectric material		Glass
Pin material		304L stainless steel
Housing material		304 stainless steel
Torque (1)	lb-in (Nm)	Finger tight to 1.5 (0.17)
Weight per connector	gms	1.65
Lock wire holes		Yes
<b>Cable</b>		
Outer jacket and conductor		304L stainless steel
Center conductor material		Nickel
Dielectric		MgO
Sleeving		Kapton, Fiberglass and SST
Diameter	in (mm)	0.125 MAX (3.18)
Weight (typical)	gram/ft	9.0
Bend radius (3)	in (mm)	0.75 (19)
<b>Environmental</b>		
Maximum temperature cable and plugs	°F (°C)	725 (385)
Minimum temperature cable and plugs	°F (°C)	-100 (-73)
Humidity		Hermetic
Integrated Gama flux	rad.	$6.2 \times 10^{10}$
Integrated neutron flux	N/cm <sup>2</sup>	$3.7 \times 10^{18}$
<b>Electrical</b>		
Insulation resistance, room temperature (2)	GΩ	200
Insulation resistance at 900°F (482°C)	MΩ	10
Cable capacitance (2)	pF/ft. (mtr)	63 (206)

**Optional Accessory:** Model 33268 In-line cable adaptor rated to 1000°F (537°C). Allows connecting coaxial cables to one another.

**DATA SHEET**

**HIGH TEMPERATURE HARDLINE CABLE ASSEMBLY, Model 3075M19**

**06 Outline details**

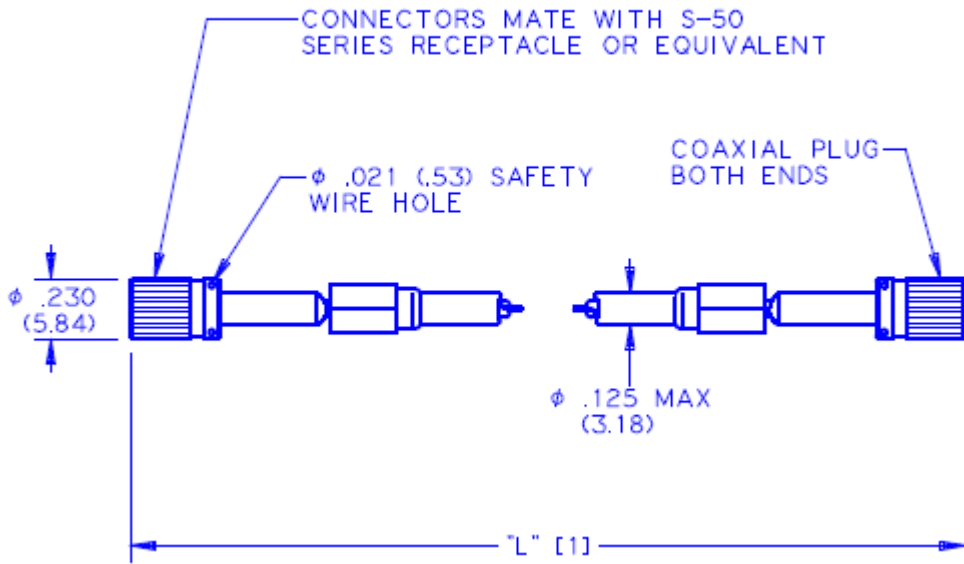

**LENGTH TOLERANCE TABULATION:** Standard cable lengths in inches: 36, 60,120

Length inches (millimeters)	Tolerance inches (millimeters)
Up to 12 (304.8)	+1.00 (25.4)
12 to 36 (304.8 to 914.4)	+2.00 (50.8)
36 to 120 (914.4 to 3.05 meters)	+4.00 (101.6)
120 (3.05 meters)	+4.00 (101.6) per 120 (3.05 meters) or part there of

Notes:

1. For high g shock and vibration the knurled nut should be tightened beyond finger tight. Use of the lock wire holes is also recommended to prevent the threads from backing out.
2. These parameters are 100% tested
3. STEP file available on request
4. Compacted MgO surrounds the center conductor. The outer sheath is made of a stiff material. Both of these factors prevent stressing thus the hardline cable is inherently low noise by design.



Continued product improvement necessitates that MEGGITT reserve the right to modify these specifications without notice. MEGGITT maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. 010121