

DATA SHEET

High Temperature Piezoelectric Accelerometer (HTPE)

Model 6235M1



01 Description

The Meggitt Model 6235M1 piezoelectric accelerometer is designed for high temperature vibration monitoring and use in high temperatures, wet and dusty environments, and where high radiation is encountered. Accumulated radiation of 10^{10} rad and up to 10^{18} thermal neutrons/cm² can be tolerated. This accelerometer is designed for continuous operation to 482°C.

The Model 6235M1 has a Kevlar covered, double shielded hard-line cable with a three socketMS3474G8-33S receptacle.

The Model 6235M1 is designed and manufactured by Meggitt and incorporates Meggitt's compression element to provide a balanced output, excellent temperature stability and wide operational bandwidth. Model 6235M1 provides an electrically balanced differential output isolated from case ground for use with differential charge amplifiers.

Model number definition:

6235M1 = basic model number

6235M1-ZZZ, where ZZZ is the cable length in inches

02 Key features and benefits

- Requires no external power
- +900°F (+482°C) operation
- Hermetically sealed
- Ground isolated
- Balanced differential output
- RoHS compliant

03 Applications

- Aircraft and gas turbine engine monitoring
- Test cell vibration measurements
- Nuclear applications

04 Contact

1-833-HITEMP1

TMCSR.MSSOC@meggitt.com

DATA SHEET

HIGH TEMPERATURE PIEZOELECTRIC ACCELEROMETER, Model 6235M1

05 Specifications

The following performance specifications are typical values, referenced at +75°F (+24°C) and 159.2 Hz, unless otherwise noted unless otherwise noted.

Dynamic characteristics	Units	Value
Charge sensitivity ($\pm 5\%$)	pC/g	10 $\pm 5\%$
Frequency response	See typical amplitude response	
Resonance frequency	kHz	30(typ), 26(min)
Amplitude response ± 1 dB	Hz	1 to 9000
Temperature response	See typical curve	
Transverse sensitivity	%	≤ 3 maximum
Amplitude linearity (up to vibration limit)	%	1%/500 g
Electrical characteristics		
Output polarity	Polarity is positive on the pin A of receptacle	
Resistance		
Between signal pins	M Ω	>100 at room temp.
Each signal pin to case	K Ω	100 minimum at 900°F (482°C)
Capacitance	M Ω	>100 at room temp.
between signal pins		
Grounding	pF	725(typ) sensor element only Signal return isolated from case
Environmental characteristics		
Temperature range [1] (accelerometer only)	-325°F to +900°F (-196°C to +482°C)	
Humidity	Hermetically sealed	
Sinusoidal vibration limit	g pk	1000
Shock limit	g pk	2000
Base strain sensitivity	equiv. g pk / μ strain	0.002
Integrated gamma flux	rad	Up to 6.2×10^{10}
Integrated neutron flux	N/cm ²	Up to 3.7×10^{18}
Electromagnetic sensitivity 50 Hz, 38mT typ	m/s ² /T	20
Physical characteristics		
Dimensions	See outline detail	
Weight, without cable	gm (oz)	75 (2.6)
Case material	Inconel	
Connector	Mating connector of MS3474G8-33S	
Mounting torque	lbf-in (Nm)	14 (1.6)
Calibrations Supplied		
Charge frequency response	%	50 to 9000 Hz
Phase response	Deg	50 to 9000 Hz
Charge sensitivity,	pC/g	at 100 Hz
Resistance	M Ω	Pin to pin
Isolation resistance	M Ω	Each pin to case





Accessories:

SUPPLIED: EH700 MOUNTING SCREW-non isolated, 4mm (QTY 3)/EHW199 LOCK WASHER #8 (QTY 3)/EHM1641 WRENCH HEX KEY, METRIC (QTY 1)
OPTIONAL: Model IPC707 DIFFERENTIAL REMOTE CHARGE CONVERTER

DATA SHEET

HIGH TEMPERATURE PIEZOELECTRIC ACCELEROMETER, Model 6235M1

06 Outline details

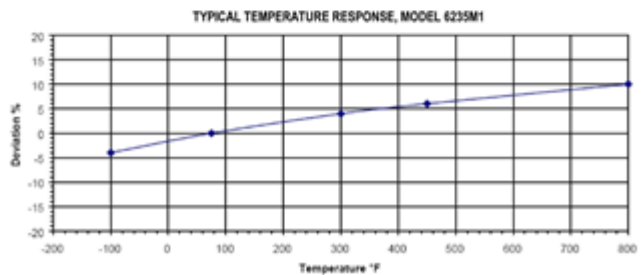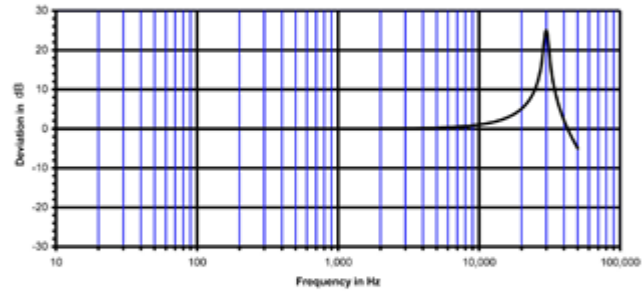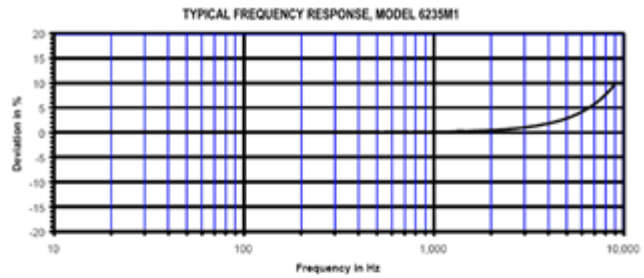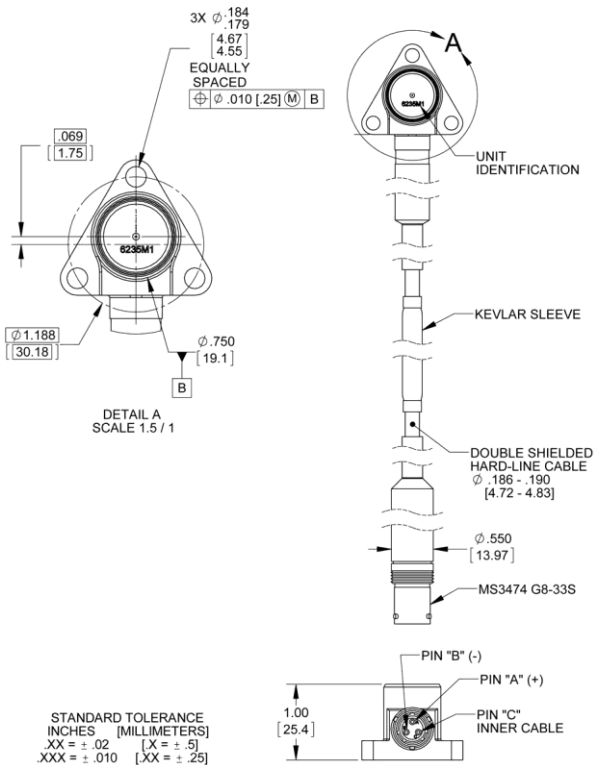

Notes:

- Spurious High Frequency discharge may be exhibited by this device for several minutes after exposure to temperature transients of greater than -100°F (-73°C) per minute.



Continued product improvement necessitates that MEGGITT reserve the right to modify these specifications without notice. MEGGITT maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. 010121