
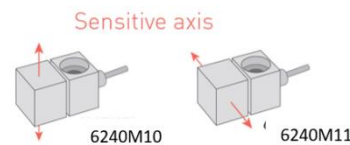


DATA SHEET

Extreme+ High Temperature Piezoelectric Accelerometer (E+HTPE)

Model
6240M10/6240M11

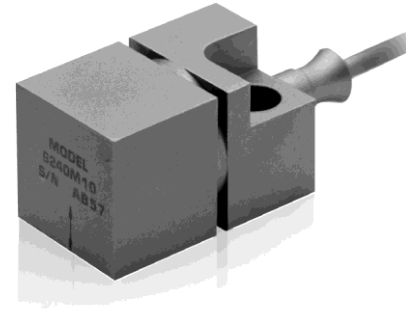

01 Description

The Meggitt models 6240M10 /6240M11 piezoelectric accelerometers are uniquely designed for continuous operation at +1200°F (+650°C) and intermittent operation up to +1400°F (+760°C). The 6240M10/6240M11's small size allows for installation in cramped quarters. These accelerometers are self-generating devices that requires no external power source for operation. The 6240M11 has its sensitive axis perpendicular to the mounting surface and the 6240M10 has its sensitive axis in line with the mounting hole.

Electrical connection is made through an integral hardline triaxial cable terminated with a 10-32 receptacle. Cable assemblies 3075M6 and 1001-ZZZ or equivalent are designed to mate with this receptacle. The sensing elements and integral shield are isolated from the case. The standard cable length is 120 inches, however, other cable lengths are also available on special order.

Model number definition:
6240M10 = sensitive axis in line with mounting hole
6240M11 = sensitive axis perpendicular to mounting hole
6240MXX -ZZZ
ZZZ = cable length in inches

02 Key features and benefits

- +1200°F (+650°C) operation, +1400°F (+760°C) intermittent
- Hermetically sealed
- No pyroelectric or thermal velocity spiking
- Single bolt mount
- Ground isolated
- RoHS compliant

03 Applications

- Aircraft and gas turbine engine monitoring
- Test cell vibration measurements
- Nuclear applications

04 Contact

1-833-HITEMP1
TMCSR.MSSOC@meggitt.com

DATA SHEET

EXTREME+HIGH TEMPERATURE PE ACCELEROMETER, Model 6240M10/11

05 Specifications

The following performance specifications are typical values, referenced at +75°F (+24°C) unless otherwise noted.

Dynamic characteristics	Units	6240M10/6240M11
Charge sensitivity, ±10%	pC/g	5.0
Resonance frequency	kHz	10
Amplitude response [1][2]		
±5%	Hz	30 to 2000
±1 dB	Hz	1 to 3000
Charge temperature response		±10% to 1200°F (+650°C)
Transverse sensitivity	%	≤ 5
Amplitude linearity	%	1
per 200 g, 0 to 1000 g		
Electrical characteristics		
Output polarity		Acceleration directed into base of unit produces positive output
Resistance (between pins)	MΩ	≥ 100
at +1200°F (+650°C) [3]	kΩ	≥ 10
Isolation (between pins)	MΩ	≥ 100
at +1200°F (+650°C)	kΩ	≥ 100
Capacitance	pF	180
accelerometer without hardline cable		
Hardline cable capacitance	pF/ft (pF/m)	110 (361)
(conductor to inner shield)		
Grounding		Signal return isolated from case
Environmental characteristics		
Temperature [4]		
Continuous		-65°F to +1200°F (-54°C to +650°C)
Intermittent [5]		-65°F to +1400°F (-54°C to +760°C)
Connector		-65°F to +500°F (-54°C to +260°C)
Humidity		
Transducer/cable		Hermetically sealed
Sinusoidal vibration limit	g pk	250
Shock limit	g pk	1000
Physical characteristics		
Dimensions		See outline detail
Weight		
Sensor without integral cable	oz (gm)	3.3 (95)
Integral cable	oz/in (gm/in)	0.04 (1.16)
Case material		Inconel
Hardline cable		Triaxial, 0.125 inch-diameter
Connector		Coaxial receptacle with 10-32 UNF threads
Mounting		Single recessed hole for 1/4 inch screw.
Mounting torque	lbf-in (Nm)	24 (2.7)
Calibrations Supplied		
Charge sensitivity (100 Hz)	pC/g	
Transverse sensitivity	%	
Capacitance	pF	

Accessories:

SUPPLIED: EH802 MOUNTING SCREW, 1/4-28 UNF X 1 inch hex cap screw


OPTIONAL: Model 1001-ZZZ Cable assembly, +550°F (288°C)

OPTIONAL: Model 3075M6-ZZZ Cable assembly +900°F (482°C)

DATA SHEET

EXTREME+HIGH TEMPERATURE PE ACCELEROMETER, Model 6240M10/11

06 Outline details

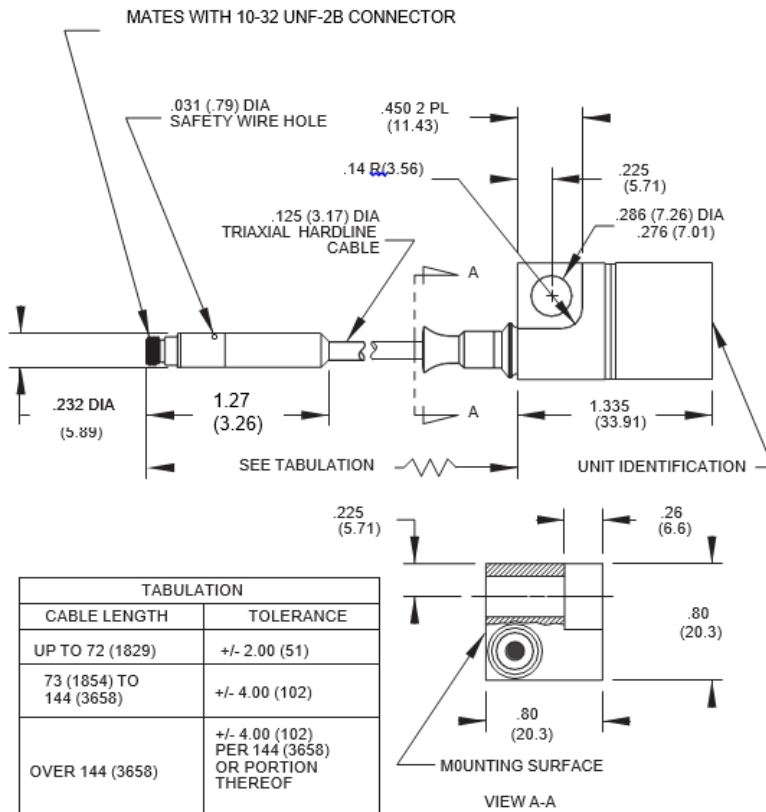

Notes:

1. Frequency response is controlled by the resonance characteristics of the transducer. Estimated calibration errors are $\pm 1.5\%$ to 900 Hz & 2.5% from 900 Hz to 5 KHz.
2. Low-end response of the transducer is a function of its associated electronics.
3. The electrical resistance of piezoelectric materials decreases with an increase in temperature but remains above 10 000 Ω at +1200°F (+650°C).
4. For cable lengths of less than 12 inches (0.30 m), the maximum operating temperature is +500°F (+260°C).
5. Intermittent exposure is defined as 5 minutes over a 30 minute period.



Continued product improvement necessitates that MEGGITT reserve the right to modify these specifications without notice. MEGGITT maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, support of stringent Quality Control requirements, and compulsory corrective action procedures. 032624

Note: Due to continuous process improvement, specifications are subject to change without notice. TCO Review #325