

HIGH TEMPERATURE PIEZOELECTRIC ACCELEROMETER (HTPE) Model 6233C-10/-50/-100



Product description

Model 6233C series piezoelectric accelerometers are designed for high temperature vibration measurement of gas turbine engines, nuclear and other high temperature applications. The unit features high sensitivity, ruggedized connector, and ARINC 3 point mounting. 6233C is designed for continuous operation to +900°F with long Mean Time Between Failure (MTBF). The accelerometer is a self-generating device that requires no external power source for operation.

6233C incorporates Parker Meggitt's crystal material to provide high output, excellent temperature stability, and wide operational bandwidth. With such high temperatures involved, this accelerometer requires the use of a charge amplifier or remote charge convertor which is designed to accept a 100 K Ω source resistance. 6233C provides a balanced differential output isolated from case ground. 6233C is available in standard ranges of 10, 50 and 100 pC/g and is designed for use with Model 6918M30 braided hardline cable or when temperature permits Model 2001 softline cable. The Model 1772M3-XX remote charge converter is recommended for 6233C-10 extended frequency range.

Combination of the 6233C-10 with the 1772M3 creates the highest temperature widest bandwidth differential piezoelectric accelerometer available on the market.

Model number definition:

6233C = basic model number

6233C-10 = sensitivity is 10 pC/g

6233C-50 = sensitivity is 50 pC/g

6233C-100 = sensitivity is 100 pC/g

6233C-XXX-US = Made in the USA

Total sensitivity of 6233C-10 with 1772M3-XX :

6233C-10 & 1772M3-01: 10mV/g

6233C-10 & 1772M3-05: 50mV/g

6233C-10 & 1772M3-10: 100mV/g

Key features and benefits

- 10, 50 or 100 pC/g sensitivity
- +900°F (+482°C) operation
- Ground isolated
- Balanced differential output
- RoHS complaint
- Extended bandwidth for combination 6233C-10 with 1772M3-XX



**Defense
Systems**

Parker Meggitt Defense Systems
9801 Muirlands Blvd.
Irvine, CA 92618
+1 (949) 465 7700
www.meggittdefense.com

HIGH TEMPERATURE PIEZOELECTRIC ACCELEROMETER (HTPE)

Model 6233C-10/-50/-100

Specifications

The following performance specifications are typical values, referenced at +75°F (+24°C) unless otherwise noted.

Dynamic characteristics	Units	-10	-50	-100
Charge sensitivity (typical)	pC/g	10	50	100
minimum	pC/g	9.5	47.5	95
maximum	pC/g	10.5	52.5	105
Total sensitivity of 6233C-10 with 1772M3-XX		6233C-10 & 1772M3-01: 10mV/g + 7/-9% 6233C-10 & 1772M3-05: 50mV/g + 7/-9% 6233C-10 & 1772M3-10: 100mV/g + 7/-9%		
Frequency response		See typical amplitude response		
Resonance frequency [1] (typical)	kHz	31	16	12
minimum	kHz	28	14	10
Amplitude response [2]		6233C-10 alone typical plot is shown in Figure 1		
±5%	Hz	10 to 5000	10 to 2500	10 to 2000
±10%	Hz	1 to 9000	1 to 4500	1 to 4000
±3dB	Hz	1 to 10,000	0.1 to 5000	0.1 to 4500
At 10,000 Hz	db	1.2	5	8
6233C-10 with 1773M3-XX		6233C-10 & 1772M3-XX typical plot is shown in Figure 2		
±5%	Hz	6233C-10 & 1772M3-01 ≤ 10 Hz - 10 kHz	6233C-10 & 1772M3-05 ≤ 10 Hz - 10 kHz	6233C-10 & 1772M3-10 ≤ 20 Hz - 10 kHz
±10%	Hz	≤ 5.6 Hz - 13 kHz	≤ 7.5 Hz - 13 kHz	≤ 13.5 Hz - 13 kHz
±3dB	Hz	≤ 3 Hz - 22 kHz	≤ 3 Hz - 22 kHz	≤ 6.5 Hz - 22 kHz
Temperature response		See typical curve		
-67°F to +900°F (-55°C to +482°C)	%	15% max over temperature range		
max/min	%	≤ 5	≤ 5	≤ 5
Transverse sensitivity				
Amplitude linearity (up to vibration limit)	%	1/500 g	1/500 g	1/250 g

Electrical characteristics



Output polarity		Acceleration directed into base of unit produces positive output		
Resistance (between pins)				
Room temperature (typical)	MΩ	≥ 100	≥ 100	≥ 100
at +900°F (+482°C)	KΩ	≥ 100	≥ 100	≥ 100
Isolation (pin to case)	MΩ	≥ 100	≥ 100	≥ 100
at +900°F (+482°C)	MΩ	≥ 10	≥ 10	≥ 10
Capacitance	pF	725	1350	2300
unbalance between pins	pF	≤ 2	≤ 2	≤ 2
Grounding		Signal return isolated from case		



Defense
Systems

HIGH TEMPERATURE PIEZOELECTRIC ACCELEROMETER (HTPE)

Model 6233C-10/-50/-100

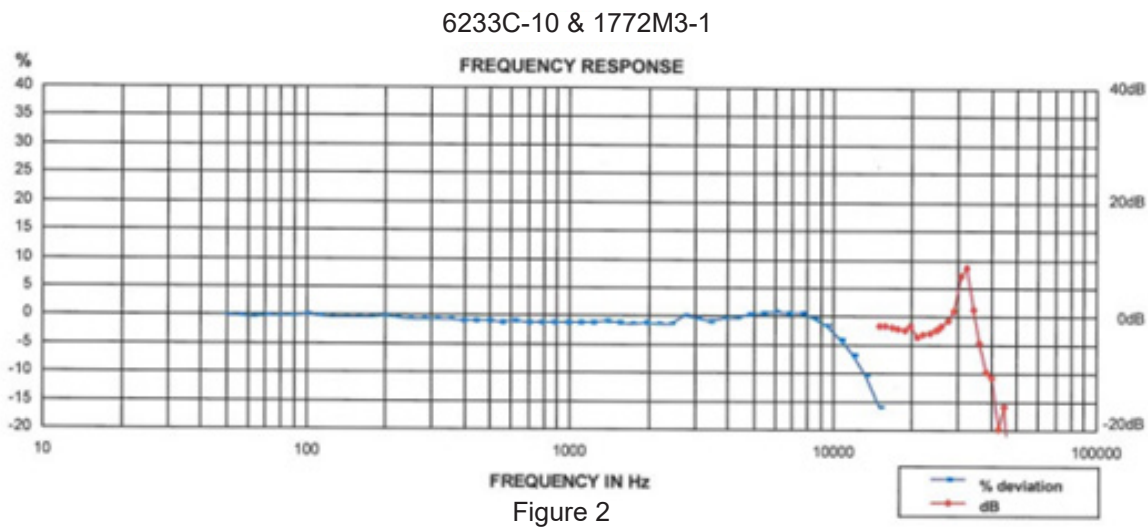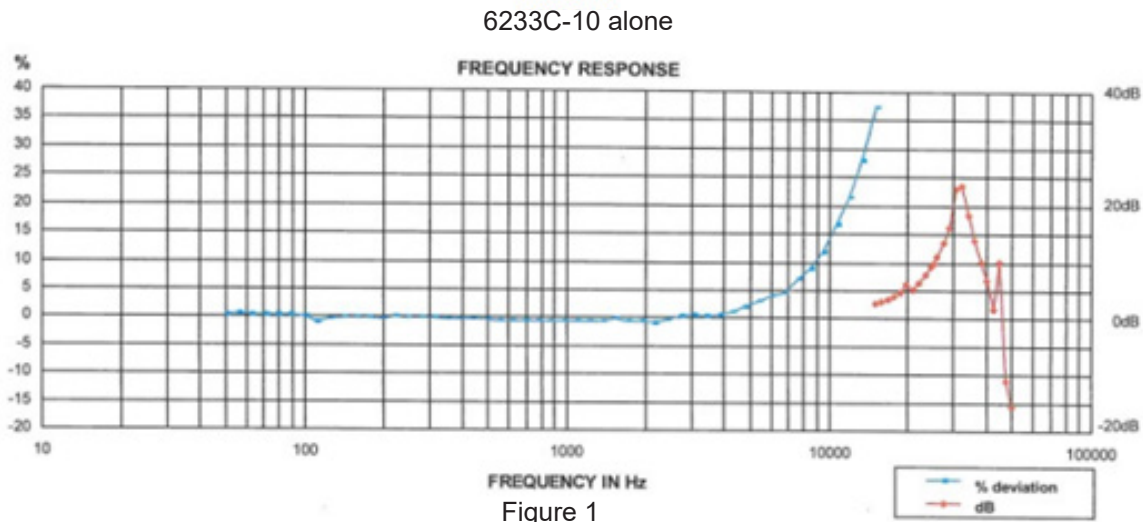

HIGH TEMPERATURE PIEZOELECTRIC ACCELEROMETER (HTPE)

Model 6233C-10/-50/-100

Specifications

Environmental characteristics	Units	-10	-50	-100
Temperature range		-67°F to +900°F (-55°C to +482°C)		
Humidity		Hermetically sealed		
Sinusoidal vibration limit	g pk	1000	1000	500
Shock limit	g pk	2000	2000	1000
Base strain sensitivity	equiv. g pk /μ strain	0.002	0.0024	0.002
Thermal transient sensitivity [3]	equiv. g pk /°F (°C)	0.10 (0.18)	0.05 (0.09)	0.03 (0.05)
Radiation				
Integrated Gamma Flux, max	rad		6.2 x 10 ¹⁰	
Integrated Neutron Flux, max	Neutron/cm2		3.7 x 10 ¹⁸	

Physical characteristics

Dimensions		See outline detail		
Weight	oz (gm)	≤ 2.6 (75)	≤ 3.8 (110)	≤ 3.8 (110)
Case material		Inconel		
Connector		Two pin receptacle designed to mate with Parker Meggitts 6918M30 and 2001 cable assemblies when temperature permits.		
Mounting torque	lbf-in (Nm)	14 (1.6)	14 (1.6)	14 (1.6)

Accessories

Supplied: EH534 SOCKET HEAD CAP SCREW, 8-32 THD, QTY 3, EHM438 PROTECTIVE CAP
Optional: Model 2001-ZZZ Cable assembly, +393°F (200°C) / Model 6918M30-ZZZ Cable Assembly +900°F (482°C)
Optional: Model IPC707 Remote Charge Converter

Supplied calibration


Charge frequency response		
6233C-10		
	dB	4000 Hz through resonance
6233C-50	%	50 to 2500 Hz
	dB	2500 Hz through resonance
6233C-100	%	50 to 2000 Hz
	dB	2000 Hz through resonance
Charge sensitivity	pC/g	
Maximum transverse sensitivity	%	
Capacitance	pF	

Notes

1. On the -10, there is a cover resonance at ~21 kHz.
2. Low-end response of the transducer is a function of the associated electronics.
3. With 1-Hz high-pass filter.
4. Parts made in the USA are marked with -US after the model number.

HIGH TEMPERATURE PIEZOELECTRIC ACCELEROMETER (HTPE)

Model 6233C-10/-50/-100

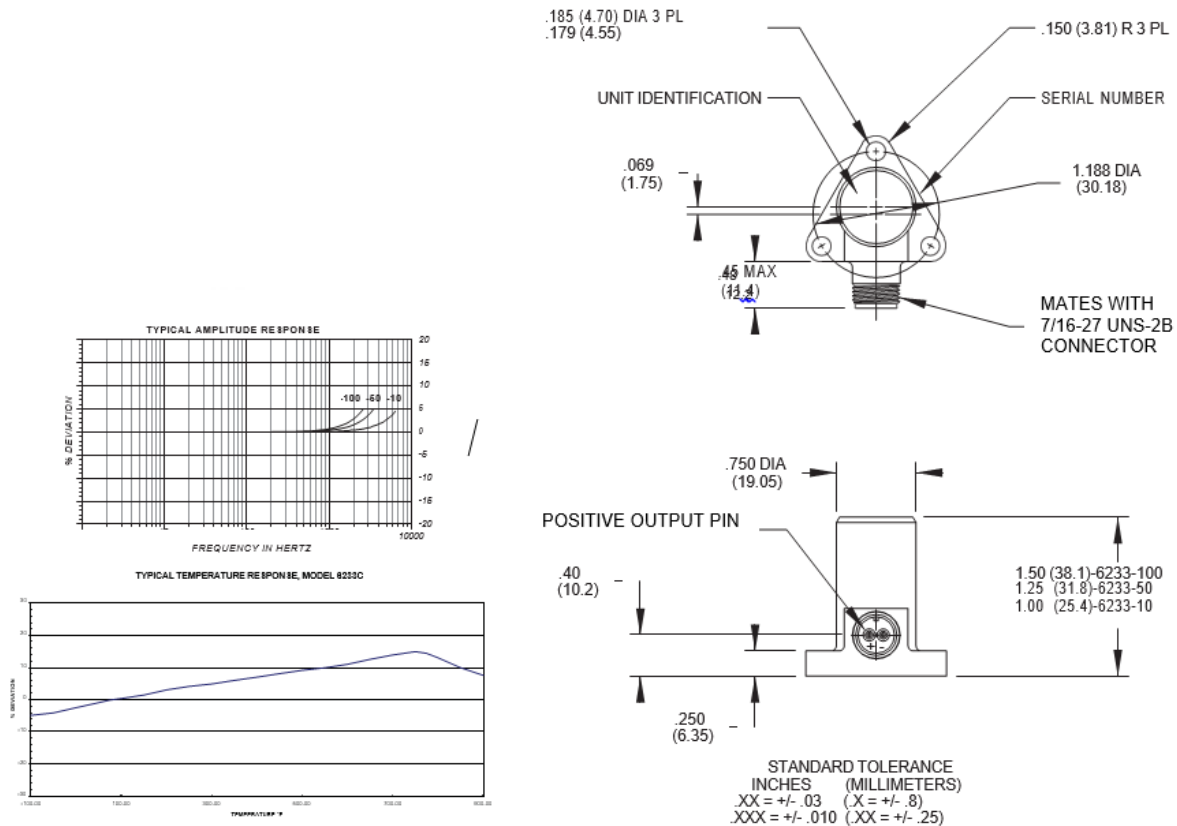

Continued product improvement necessitates that MEGGITT reserve the right to modify these specifications without notice. MEGGITT maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. 010121



**Defense
Systems**

Note: Due to continuous process improvement, specifications are subject to change without notice. TCO Review # 332